

800x1600

GVT

MATT RUSTIC SERIES

Business aside, we are very much aware of the human factors involved in our business. We are aware that our customers and employees expectation and deserve only the best. Awareness of these underlying issues lies deep within the fabric of our day-today work. We are also very much concerned about environmental factors.

We hope the above details will be in line.

If you need more details always feel free to contact with us.



To launch innovative and world class products to help customers realize dreams. To supply products of the highest quality, creating industry benchmark. Be fast and flexible, to be able to grasp opportunities in the fast changing world. To be transparent and fair to customers, suppliers, and employees in all our dealings.



We always believe in innovation, new creation.
as "Success demand creativity & innovativeness."
Development of designs done in association with customers as a partner to meet their requirements.
In very short period, managed to earn huge reputation and popularity in the industry just because of the fact that it achieved to satisfy the exact needs of clients.
We have well-managed marketing & distribution channel for even distribution of our tiles nationally and in overseas market. We deliver excellent customer service and that what helped us in creating success and a niche presence in the industry as notable exporter of Indian tiles.

MATT RUSTIC COLOR SHADES











BRAZILLIA CEMENTO


DUMO GREY

LIME STONE GREY

MONALISA GREY

IRISH WOOD

SIZES AND THICKNESS



TECHNICAL CHARACTERISTICS



Waterproof Surface



Respectful Environment



Wear Resistance



Chemical Resistance



Impact Resistance



Lightweight



Scratch Resistance



Flexural Strength

BRAZILIA GREY

800x1600mm Size:





























BRAZILLIA CEMENTO

Size: 800x1600mm




























DUMO ANTRACITA

800x1600mm Size:

















frost proof







DUMO GREY

800x1600mm Size:

MATTRUSTIC Finish:



CRYSTAL GLAZED



















frost proof







EIEMENTAL GREY

Size: 800x1600mm

























LIME STONE GREY

800x1600mm Size:



















frost proof











LIME STONE

800x1600mm Size:



















frost proof



PORCELANO IVORY

Size: 800x1600mm




























PORCELANO LATE

800x1600mm Size:






















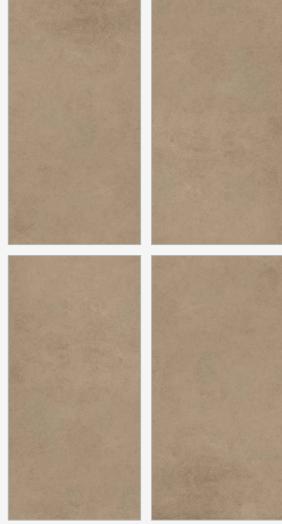


SLATE BROWN

Size: 800x1600mm





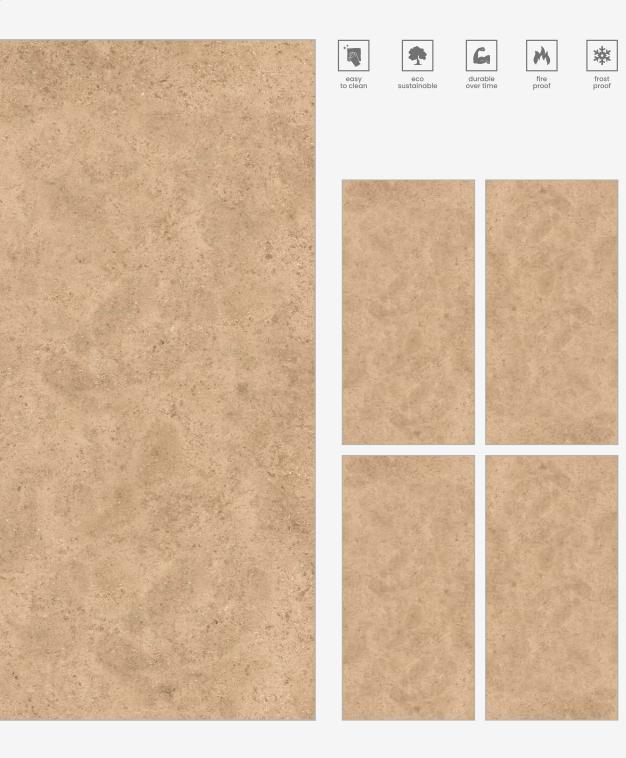

STONE BEIGE

800x1600mm Size:















frost proof







STONE BRAWON

800x1600mm Size:

















frost proof







STONE CEMENTO

Size: 800x1600mm


























STONE GREY

800x1600mm Size:

MATTRUSTIC Finish:



CRYSTAL GLAZED














frost proof

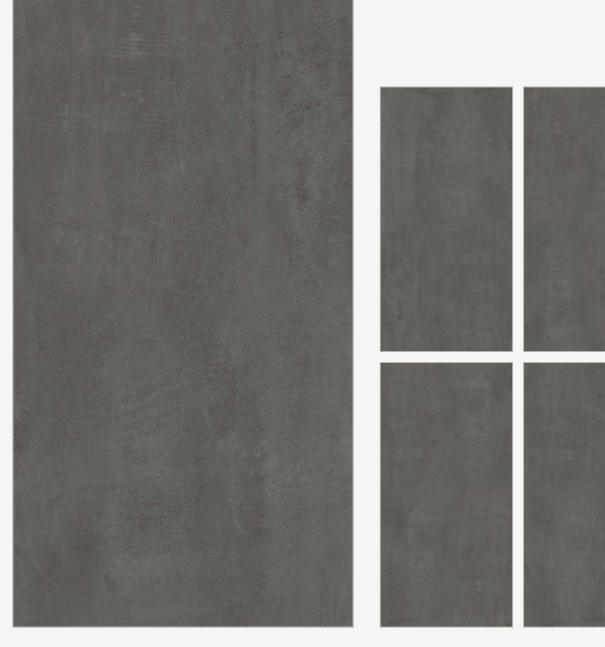





STONE IVORY

800x1600mm Size:


























STONE WHITE

800x1600mm Size:























TEXA CREME

800x1600mm Size:





















frost proof





TEXA GREIGE

Size: 800x1600mm























ARCTIC WOOD

Size: 800x1600mm















fire proof












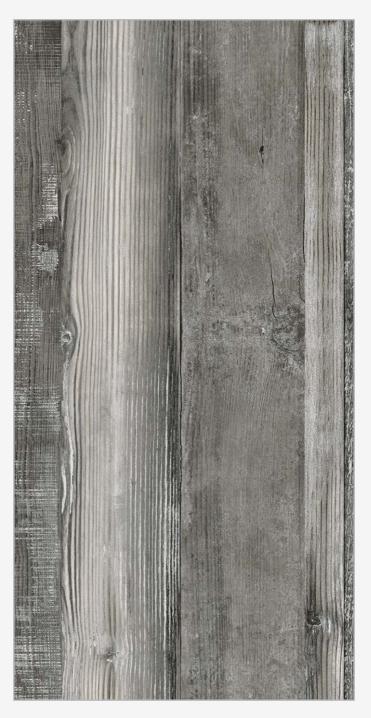

CEDAR WOOD

800x1600mm Size:





























IRISH WOOD

800x1600mm Size:















eco sustainable

durable over time

frost proof















TIMBER WOOD

800x1600mm Size:



















eco sustainable

durable over time

frost proof











TECHNICAL SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/EN14411	MEAN VALUE OF OUR MATT	TEST METHOD						
GROUP BIA COR MALT									
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2						
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2						
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2						
- Rectangularity	±0.6 %	±0.1 %	ISO-10545-2						
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2						
Color difference	Unaltered	No change	ISO-10545-16						
Glossiness	As per mfg.	Min. 90%	GLOSSOMETER						
SURFACE MECHANICAL PROPERTIES									
Water absorption	< 0.50 %	< 0.05 %	ISO-10545-3						
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082						
MASSIVE MECHANICAL PROPERTIES									
Modulus of rupture	Min. 35 N/mm²	Min. 40 N/mm²	ISO-10545-4						
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4						
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5						
SURFACE MECHANICAL PROPERTIES									
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7						
MOH's hardness	As per mfg	Min. 4	EN 101						
THERMO HYDROMETRIC PROPERTIES									
Frost resistance	No damage	No damage	ISO-10545-12						
Thermal shock resistance	No damage	No damage	ISO-10545-9						
Moisture expansion	Nil	Nil	ISO-10545-10						
Thermal expansion (COE)	Max. 9.0x10 ⁻⁶	Max. 6.5x10 ⁻⁶	ISO-10545-8						
Crazing resistance	As per mfg.	Min. 10 Cycle	ISO-10545-11						
CHEMICAL PROPERTIES									
Chemical resistance	No damage	No damage	ISO-10545-13						
Stain resistance	Resistant	Resistant	ISO-10545-14						
SAFETY PROPERTIES									
Slip resistance	As per mfg.	> 0.40	ISO-10545-17						
Fire resistance	As per mfg.	Fireproof	N. A.						
Lead & Cadmium given off by glazed tiles	As per mfg.	Doesn't yield Pb & Cd	ISO-10545-15						

PACKING DETAILS

Sr. No.	Size	Thickness (approx*)	Pieces / Box	Area / Box (approx*)		Packing
1	80x160cm	9 to mm	2 pcs.	2.56 sq. mtr.	27.55 sq. ft.	Box

AARTOS INTERNATIONAL LLP

Head Office

Office No. S16-S17, A Wing, 2nd floor, Ishan Cera Zone, Lalpar Morbi - 363 642, Gujarat, India.

Branch Office

Ruda - 1, Plot No. 12, Kalawad Road, Rajkot - 360 005, Gujarat, India.

🔀 : aartosinternational@gmail.com 🔞 : +91 98980 92843

: www.aartos.in